


MULTILIFT ULTIMA 22SL


LOW-BUILT HOOKLIFT

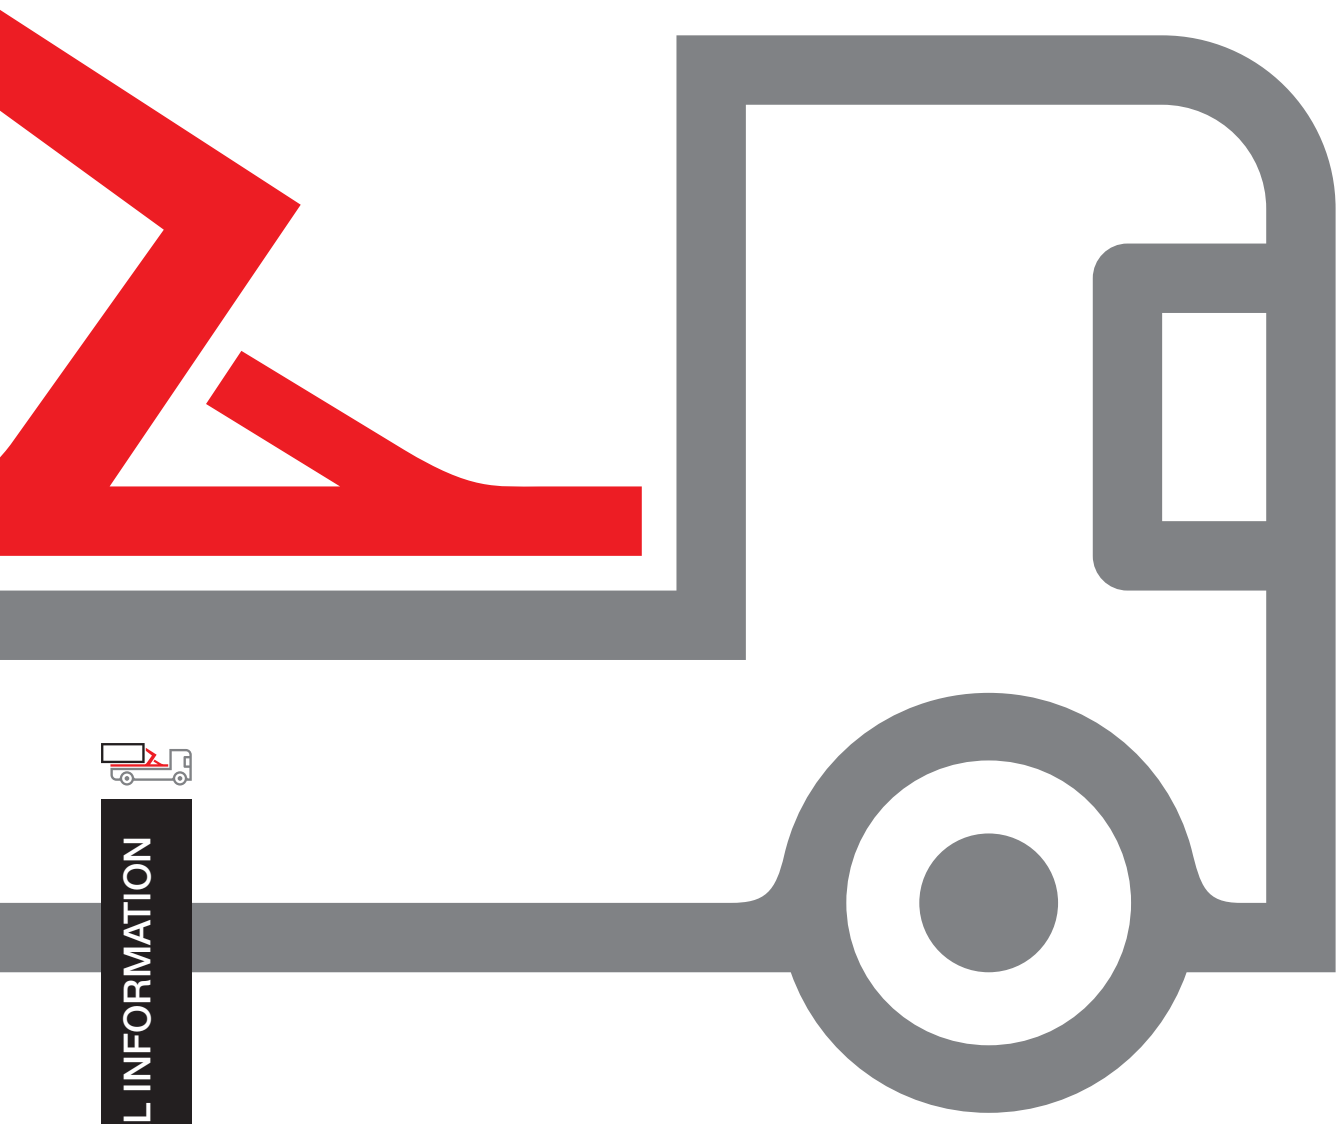

TECHNICAL INFORMATION

MULTILIFT ULTIMA 22SL BASIC DATA

Type	ULTIMA 22SL				
Vehicle type	3-4 axle				
GVW of the vehicle (t)	26-32				
Capacity (t)	22				
G-length	53	56	58	59	61
System weight (kg) *	2405	2425	2475	2475	2485
Tipping angle (°)	55	52	52	52	52
Max. operating pressure (MPa)	30				
Recommended oil flow (l/min)	100				

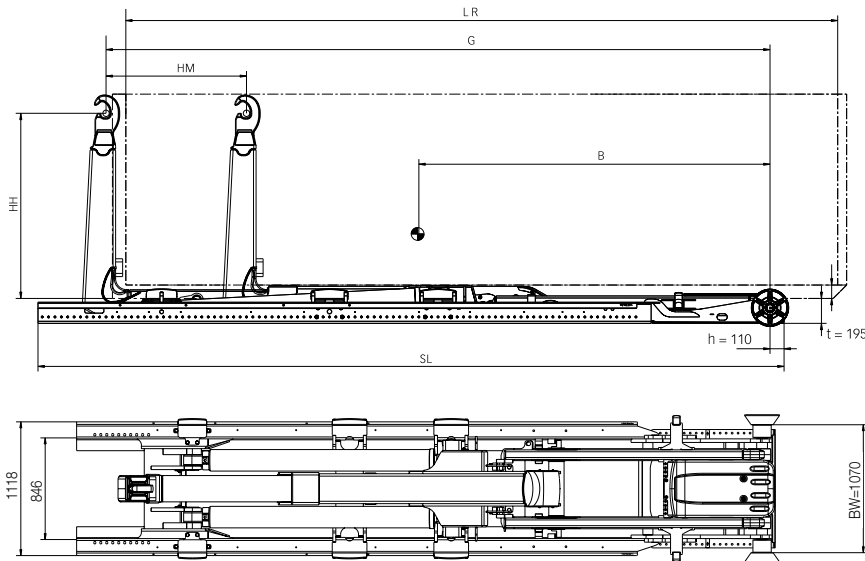

Primary dimensions

Technical data	ULTIMA 22SL.53	ULTIMA 22SL.56	ULTIMA 22SL.58	ULTIMA 22SL.59	ULTIMA 22SL.61
LR = Body length (m) (min – max)	4.5 - 6.4	4.8 - 6.6	4.9 - 6.8	4.9 - 6.9	4.9 - 7.1
SL = Subframe length (mm) **	6143	6443	6443	6443	6593
BW = Body width (mm)***	1070				
B = Centre of gravity (mm)	3150	3300	3400	3400	3500
G = Exact G-length (mm)	5380	5600	5800	5900	6100
HM = Horizontal movement (mm)	1100	1100	1150	1250	1450
t = Min free tunnel height (body) (mm)***	105 / 85				
h = Installation height (mm)	195 / 215				
HH = Hook height (mm)	1400 / 1425 / 1450 / 1570				

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.