



MULTILIFT XR21SL


XR LOW-BUILT RANGE



TECHNICAL INFORMATION

Technical data

Type	XR21SL			
Vehicle type	3 axle			
GVW of the vehicle (t)	26			
Capacity (t)	21			
G-length	51	52	53	56
System weight (kg) *	2100	2150	2200	2220
Tipping angle (°)	52	52	55	52
Max. operating pressure (MPa)	30			
Recommended oil flow (l/min)	80			

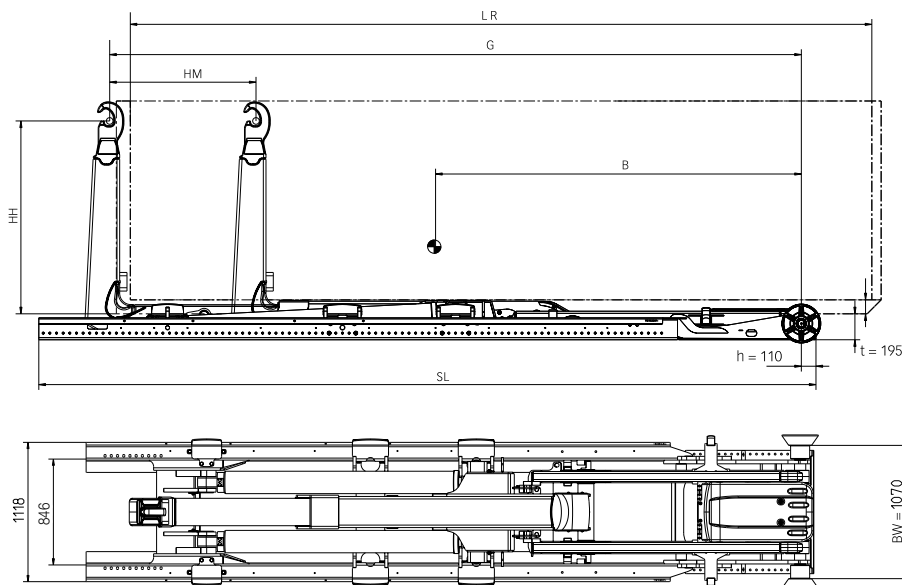

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local MULTILIFT dealer.

Primary dimensions

Model	XR21SL.51	XR21SL.52	XR21SL.53	XR21SL.56
LR = Body length (min – max) internal (m)	4.3 – 6.1	4.5 – 6.3	4.6 – 6.4	4.8 – 6.6
SL = Subframe length (mm) **	5843	5843	6143	6443
B = Centre of gravity (mm)	3000	3070	3150	3300
G = Exact G-length (mm)	5060	5200	5340	5560
HM = Horizontal movement (mm)	1100			
t = Min. Free tunnel height (body) (mm)	105			
h = Installation height (mm)	195			
HH = Hook height (mm)	1450			

Sales contact